


DKBH型

往复运动用防尘密封件

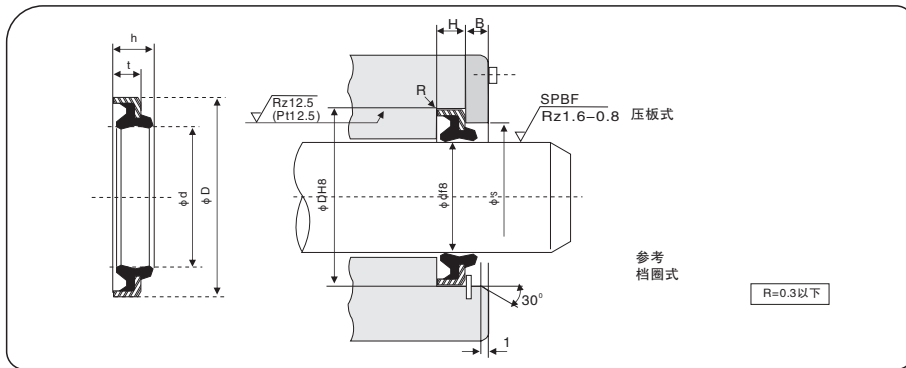

1、特点:

防尘性能极佳的双唇型标准型防尘密封圈。

2、应用范围

挖掘机、推土机、平路机、装载机、运输车、铲车
 冲压机、切割机、折弯机、注塑机、液压设备

3、使用工况: 往复运动

4、材料: 丁腈胶 + 金属环

5、应用极限

最大速度: 3 m/s

温度范围: -30 ~ 100°C

DKBH型

往复运动用防尘密封件

名义号	密封件公称尺寸				腔体尺寸		
	d	D	t	h	φS	H	B
DKBH20-30-6/9	20	30	6	9	25	6.4	4
DKBH25-37-6/9	25	37	6	9	31	6.4	4
DKBH30-42-6/9	30	42	6	9	36	6.4	4
DKBH30-47-7/10	30	47	7	10	38.5	7.4	4
DKBH35-47-7/10	35	47	7	10	41	7.4	4
DKBH40-52-7/10	40	52	7	10	46	7.4	4
DKBH45-57-7/10	45	57	7	10	51	7.4	4
DKBH50-62-7/10	50	62	7	10	56	7.4	4
DKBH55-69-8/11	55	69	8	11	62	8.5	4
DKBH60-74-8/11	60	74	8	11	67	8.5	4
DKBH65-79-8/11	65	79	8	11	72	8.5	4
DKBH70-84-8/11	70	84	8	11	77	8.5	4
DKBH75-89-8/11	75	89	8	11	82	8.5	4
DKBH80-94-8/11	80	94	8	11	87	8.5	4
DKBH85-114-8/11	85	114	8	11	99.5	8.5	4
DKBH85-99-8/11	85	99	8	11	92	8.5	4
DKBH90-104-8/11	90	104	8	11	97	8.5	4
DKBH90-110-8/11	90	110	8	11	100	8.5	4
DKBH95-109-8/11	95	109	8	11	102	8.5	4
DKBH100-114-8/11	100	114	8	11	107	8.5	4
DKBH105-121-9/12	105	121	9	12	113	9.5	5
DKBH110-126-9/12	110	126	9	12	118	9.5	5
DKBH115-131-9/12	115	131	9	12	123	9.5	5
DKBH120-136-9/12	120	136	9	12	128	9.5	5
DKBH125-141-9/12	125	141	9	12	133	9.5	5
DKBH130-146-8/13	130	146	8	13	138	8.5	4
DKBH130-146-9/12	130	146	9	12	138	9.5	5
DKBH130-146-9/15	130	146	9	15	138	9.5	5
DKBH135-150-8/11	135	150	8	11	142.5	8.5	4
DKBH135-151-9/12	135	151	9	12	143	9.5	5
DKBH140-160-10/14	140	160	10	14	150	10.5	5
DKBH145-165-9/12	145	165	9	12	155	9.5	5
DKBH150-170-10/14	150	170	10	14	160	10.5	5
DKBH150-170-9/12	150	170	9	12	160	9.5	5
DKBH160-180-10/14	160	180	10	14	170	10.5	5
DKBH170-190-10/14	170	190	10	14	180	10.5	5
DKBH180-205-12/17	180	205	12	17	192.5	12.5	6
DKBH210-230-12/17	210	230	12	17	220	12.5	6
DKBH210-235-12/17	210	235	12	17	222.5	12.5	6
DKBH250-275-12/17	250	275	12	17	262.5	12.5	6