


SGM-B型

活塞专用组合密封件


SGM-B型 活塞专用组合密封件

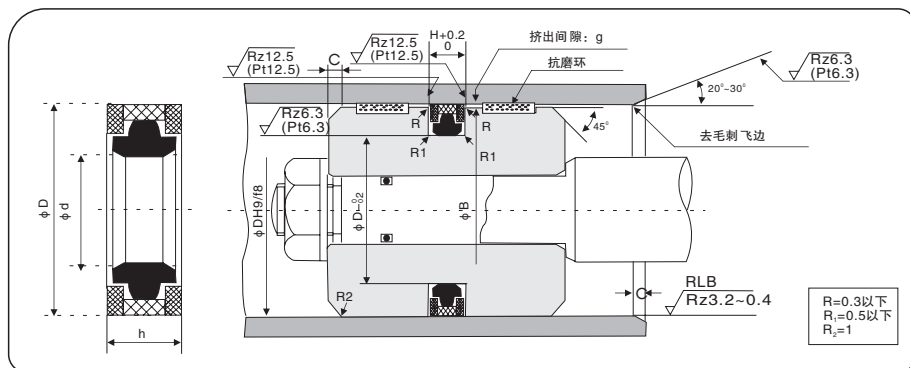

- 1、特点：
滑动材料选用复合聚四氟乙烯，提高了密封间的耐用性。适用高压快速工况。
- 2、应用范围
挖掘机、推土机、平路机、装载机、运输车、铲车
冲压机、切割机、折弯机、注塑机、液压设备
- 3、使用工况：往复运动
- 4、材料：PTFE+尼龙+丁腈胶
- 5、应用极限
最大压力：35 MPa
最大速度：3 m/s
温度范围：-30 ~ 100℃

如何决定B的尺寸

■ 决定 ϕB 尺寸，考虑活塞的偏心之后，请把最大挤出间隙（单侧）与右图对照。



名义号	密封件公称尺寸			腔体尺寸		
	D	d	h	ϕD	ϕd	H
SGM-B50-36-8.5	50	36	8.5	50	36	9
SGM-B55-41-8.5	55	41	8.5	55	41	9
SGM-B60-46-8.5	60	46	8.5	60	46	9
SGM-B65-50-10.5	65	50	10.5	65	50	11
SGM-B70-55-10.5	70	55	10.5	70	55	11
SGM-B75-60-10.5	75	60	10.5	75	60	11
SGM-B80-65-10.5	80	65	10.5	80	65	11
SGM-B85-70-10.5	85	70	10.5	85	70	11
SGM-B90-75-10.5	90	75	10.5	90	75	11
SGM-B95-80-10.5	95	80	10.5	95	80	11
SGM-B100-85-12	100	85	12	100	85	12.5
SGM-B105-90-12	105	90	12	105	90	12.5
SGM-B108-93-12	108	93	12	108	93	12.5
SGM-B110-95-12	110	95	12	110	95	12.5
SGM-B115-100-12	115	100	12	115	100	12.5
SGM-B120-105-12	120	105	12	120	105	12.5
SGM-B125-102-15.5	125	102	15.5	125	102	16
SGM-B130-107-15.5	130	107	15.5	130	107	16
SGM-B135-112-15.5	135	112	15.5	135	112	16
SGM-B140-117-15.5	140	117	15.5	140	117	16
SGM-B145-122-15.5	145	122	15.5	145	122	16
SGM-B150-127-15.5	150	127	15.5	150	127	16
SGM-B155-132-15.5	155	132	15.5	155	132	16
SGM-B160-137-15.5	160	137	15.5	160	137	16
SGM-B165-142-15.5	165	142	15.5	165	142	16
SGM-B170-147-15.5	170	147	15.5	170	147	16
SGM-B175-152-15.5	175	152	15.5	175	152	16
SGM-B180-157-15.5	180	157	15.5	180	157	16
SGM-B185-162-15.5	185	162	15.5	185	162	16
SGM-B190-167-15.5	190	167	15.5	190	167	16
SGM-B200-177-15.5	200	177	15.5	200	177	16
SGM-B205-182-15.5	205	182	15.5	205	182	16
SGM-B210-187-15.5	210	187	15.5	210	187	16
SGM-B215-192-15.5	215	192	15.5	215	192	16
SGM-B220-197-15.5	220	197	15.5	220	197	16
SGM-B225-202-15.5	225	202	15.5	225	202	16
SGM-B230-207-15.5	230	207	15.5	230	207	16
SGM-B235-212-15.5	235	212	15.5	235	212	16
SGM-B240-217-15.5	240	217	15.5	240	217	16
SGM-B250-222-17	250	222	17	250	222	17.5
SGM-B260-232-17	260	232	17	260	232	17.5
SGM-B270-242-17	270	242	17	270	242	17.5
SGM-B280-252-17	280	252	17	280	252	17.5
SGM-B290-262-17	290	262	17	290	262	17.5
SGM-B300-272-17	300	272	17	300	272	17.5
SGM-B320-292-17	320	292	17	320	292	17.5
SGM-B330-302-17	330	302	17	330	302	17.5
SGM-B350-322-17	350	322	17	350	322	17.5
SGM-B385-357-17	385	357	17	385	357	17.5
SGM-B409-381-17	409	381	17	409	381	17.5
SGM-B430-402-17	430	402	17	430	402	17.5
SGM-B450-422-17	450	422	17	450	422	17.5