


SLM型

活塞专用密封件

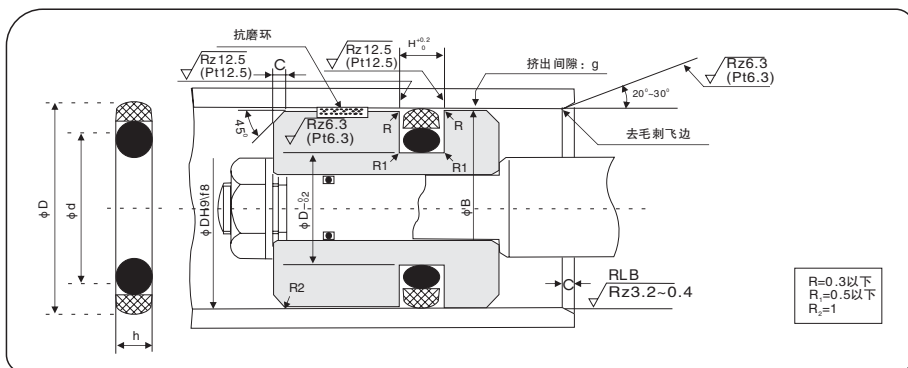

1、特点:

改良后的STM型。滑环弧型设计工作面，改善了弹性体的受压能力。

2、应用范围

挖掘机、推土机、平路机、装载机、运输车、铲车
 冲压机、切割机、折弯机、注塑机、液压设备

3、使用工况：往复运动

4、材料：特氟龙+丁腈胶

5、应用极限


最大压力：25 MPa

最大速度：3 m/s

温度范围：-30~100℃

如何决定B的尺寸

■ 决定φB尺寸，考虑活塞的偏心之后，请把最大挤出间隙（单侧）与右图对照。



SLM型

活塞专用密封件

名义号	密封件公称尺寸			腔体尺寸		
	D	d	h	φD	φd	H
SLM55-37.74-6	55	37.74	6	55	37.74	6.2
SLM60-42.74-6	60	42.74	6	60	42.74	6.2
SLM65-47.74-6	65	47.74	6	65	47.74	6.2
SLM70-52.74-6	70	52.74	6	70	52.74	6.2
SLM75-57.74-6	75	57.74	6	75	57.74	6.2
SLM80-56.84-8	80	56.84	8	80	56.84	8.2
SLM80-62.74-6	80	62.74	6	80	62.74	6.2
SLM85-61.84-8	85	61.84	8	85	61.84	8.2
SLM85-67.74-6	85	67.74	6	85	67.74	6.2
SLM90-66.84-8	90	66.84	8	90	66.84	8.2
SLM90-72.74-6	90	72.74	6	90	72.74	6.2
SLM95-71.84-8	95	71.84	8	95	71.84	8.2
SLM95-77.74-6	95	77.74	6	95	77.74	6.2
SLM100-79.84-8	100	79.84	8	100	79.84	8.2
SLM100-82.74-6	100	82.74	6	100	82.74	6.2
SLM105-81.84-8	105	81.84	8	105	81.84	8.2
SLM105-87.74-6	105	87.74	6	105	87.74	6.2
SLM110-86.84-8	110	86.84	8	110	86.84	8.2
SLM110-92.74-6	110	92.74	6	110	92.74	6.2
SLM115-91.84-8	115	91.84	8	115	91.84	8.2
SLM115-97.74-6	115	97.74	6	115	97.74	6.2
SLM120-102.74-6	120	102.74	6	120	102.74	6.2
SLM120-96.84-8	120	96.84	8	120	96.84	8.2
SLM125-101.84-8	125	101.84	8	125	101.84	8.2
SLM130-106.6-8	130	106.6	8	130	106.6	8.2
SLM135-111.84-8	135	111.84	8	135	111.84	8.2
SLM140-116.84-8	140	116.84	8	140	116.84	8.2
SLM145-121.84-8	145	121.84	8	145	121.84	8.2
SLM150-126.84-8	150	126.84	8	150	126.84	8.2
SLM155-131.84-8	155	131.84	8	155	131.84	8.2
SLM160-136.84-8	160	136.84	8	160	136.84	8.2
SLM165-141.84-8	165	141.84	8	165	141.84	8.2
SLM170-146.84-8	170	146.84	8	170	146.84	8.2
SLM175-151.84-8	175	151.84	8	175	151.84	8.2
SLM180-156.84-8	180	156.84	8	180	156.84	8.2
SLM190-166.84-8	190	166.84	8	190	166.84	8.2
SLM200-176.84-8	200	176.84	8	200	176.84	8.2
SLM210-186.84-8	210	186.84	8	210	186.84	8.2
SLM225-201.84-8	225	201.84	8	225	201.84	8.2

