


SPGM型

活塞专用密封件

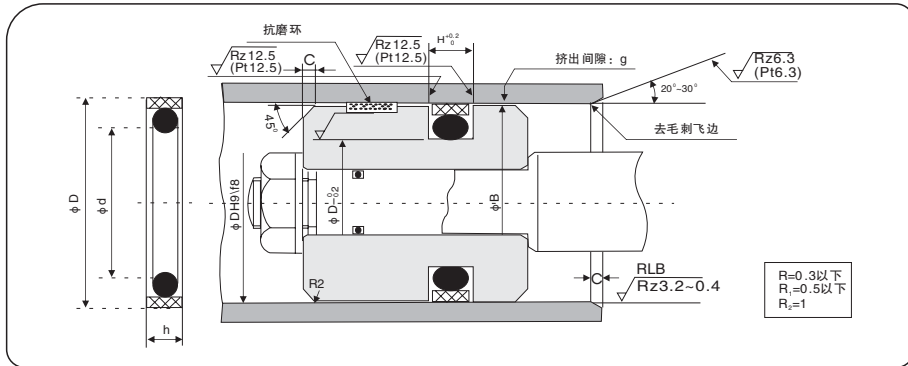

1、特点:

滑动材料选用聚四氟乙烯, 适用高压快速工况。

2、应用范围

挖掘机、推土机、平路机、装载机、运输车、铲车
冲压机、切割机、折弯机、注塑机、液压设备

3、使用工况: 往复运动

4、材料: PTFE+丁腈胶

5、应用极限


最大压力: 35 MPa

最大速度: 3 m/s

温度范围: -30 ~ 100℃

如何决定B的尺寸

■ 决定φB尺寸, 考虑活塞的偏心之后, 请把最大挤出间隙(单侧)与右图对照。



SPGM型 活塞专用密封件

名义号	密封件公称尺寸			槽宽 (h+0.2)	通用编号	O型圈
	D	d	h			
SPGM8-3.1-2	8	3.1	2	2.2	GS55044-0080	AS-006
SPGM10-5.1-2	10	5.1	2	2.2	GS55044-0100	4.8*1.8
SPGM14-9.1-2	14	9.1	2	2.2	GS55044-0140	8.8*1.8
SPGM15-10.1-2	15	10.1	2	2.2	GS55046-0150	9.8*1.8
SPGM15-7.5-3	15	7.5	3	3.2	GS55044-0150	AS-109
SPGM16-11.1-2	16	11.1	2	2.2	GS55046-0160	AS-013
SPGM16-8.5-3	16	8.5	3	3.2	GS55044-0160	AS-109
SPGM18-13.1-2	18	13.1	2	2.2	GS55046-0180	AS-014
SPGM18-10.5-3	18	10.5	3	3.2	GS55044-0180	AS-110
SPGM20-15.1-2	20	15.1	2	2.2	GS55046-0200	AS-015
SPGM20-12.5-3	20	12.5	3	3.2	GS55044-0200	AS-112
SPGM24-19.1-2	24	19.1	2	2.2	GS55046-0240	AS-018
SPGM24-16.5-3	24	16.5	3	3.2	GS55044-0240	AS-114
SPGM25-17.5-3	25	17.5	3	3.2	GS55044-0250	AS-115
SPGM25-14-4	25	14	4	4.2	GS55042-0250	AS-207
SPGM28-20.5-3	28	20.5	3	3.2	GS55044-0280	AS-117
SPGM28-17-4	28	17	4	4.2	GS55042-0280	AS-209
SPGM30-22.5-3	30	22.5	3	3.2	GS55044-0320	AS-118
SPGM30-19-4	30	19	4	4.2	GS55042-0300	AS-210
SPGM32-24.5-3	32	24.5	3	3.2	GS55044-0320	AS-119
SPGM32-21-4	32	21	4	4.2	GS55042-0320	AS-211
SPGM35-27.5-3	35	27.5	3	3.2	GS55044-0350	AS-121
SPGM35-24-4	35	24	4	4.2	GS55042-0350	AS-213
SPGM36-28.5-3	36	28.5	3	3.2	GS55044-0360	AS-122
SPGM36-25-4	36	25	4	4.2	GS55042-0360	AS-214
SPGM38-30.5-3	38	30.5	3	3.2	GS55044-0380	AS-123
SPGM38-27-4	38	27	4	4.2	GS55042-0380	AS-215
SPGM40-32.5-3	40	32.5	3	3.2	GS55046-0400	AS-124
SPGM40-29-4	40	29	4	4.2	GS55044-0400	AS-216
SPGM45-37.5-3	45	37.5	3	3.2	GS55046-0450	AS-127
SPGM45-34-4	45	34	4	4.2	GS55044-0450	AS-219
SPGM48-40.5-3	48	40.5	3	3.2	GS55046-0480	AS-129
SPGM48-37-4	48	37	4	4.2	GS55044-0480	AS-221
SPGM50-39-4	50	39	4	4.2	GS55044-0500	AS-222
SPGM50-34.5-6.1	50	34.5	6.1	6.3	GS55042-0500	AS-323
SPGM52-41-4	52	41	4	4.2	GS55044-0520	AS-223
SPGM52-36.5-6.1	52	36.5	6.1	6.3	GS55042-0520	35*5.3
SPGM55-44-4	55	44	4	4.2	GS55044-0550	AS-224
SPGM55-39.5-6.1	55	39.5	6.1	6.3	GS55042-0550	AS-325
SPGM56-45-4	56	45	4	4.2	GS55044-0560	AS-224
SPGM56-40.5-6.1	56	40.5	6.1	6.3	GS55042-0560	39*5.3
SPGM60-49-4	60	49	4	4.2	GS55044-0600	AS-225
SPGM60-44.5-6.1	60	44.5	6.1	6.3	GS55042-0600	AS-327
SPGM63-52-4	63	52	4	4.2	GS55044-0630	AS-226
SPGM63-47.5-6.1	63	47.5	6.1	6.3	GS55042-0630	AS-328
SPGM64-53-4	64	53	4	4.2	GS55044-0640	52*3.5
SPGM64-48.5-6.1	64	48.5	6.1	6.3	GS55042-0640	AS-328
SPGM65-54-4	65	54	4	4.2	GS55044-0650	AS-227

SPGM型 活塞专用密封件

名义号	密封件公称尺寸			槽宽 (h+0.2)	通用编号	O型圈
	D	d	h			
SPGM65-49.5-6.1	65	49.5	6.1	6.3	GS55042-0650	48*5.3
SPGM70-59-4	70	59	4	4.2	GS55044-0700	AS-228
SPGM70-54.5-6.1	70	54.5	6.1	6.3	GS55042-0700	AS-330
SPGM75-64-4	75	64	4	4.2	GS55044-0750	AS-230
SPGM75-59.5-6.1	75	59.5	6.1	6.3	GS55042-0750	AS-331
SPGM80-69-4	80	69	4	4.2	GS55046-0800	AS-231
SPGM80-64.5-6.1	80	64.5	6.1	6.3	GS55044-0800	AS-333
SPGM85-74-4	85	74	4	4.2	GS55046-0850	73*3.5
SPGM85-69.5-6.1	85	69.5	6.1	6.3	GS55044-0850	AS-335
SPGM90-79-4	90	79	4	4.2	GS55046-0900	AS-235
SPGM90-74.5-6.1	90	74.5	6.1	6.3	GS55044-0900	AS-336
SPGM95-84-4	95	84	4	4.2	GS55046-0950	84-3.5
SPGM95-79.5-6.1	95	79.5	6.1	6.3	GS55044-0950	AS-338
SPGM100-89-4	100	89	4	4.2	GS55046-1000	AS-238
SPGM100-84.5-6.1	100	84.5	6.1	6.3	GS55044-1000	AS-339
SPGM105-94-4	105	94	4	4.2	GS55046-1050	AS-239
SPGM105-89.5-6.1	105	89.5	6.1	6.3	GS55044-1050	AS-341
SPGM110-99-4	110	99	4	4.2	GS55046-1100	AS-241
SPGM110-94.5-6.1	110	94.5	6.1	6.3	GS55044-1100	AS-342
SPGM115-99.5-6.1	115	99.5	6.1	6.3	GS55044-1150	AS-344
SPGM120-104.5-6.1	120	104.5	6.1	6.3	GS55044-1200	AS-345
SPGM125-109.5-6.1	125	109.5	6.1	6.3	GS55044-1250	AS-347
SPGM125-104-7.9	125	104	7.9	8.1	GS55042-1250	103*7
SPGM130-114.5-6.1	130	114.5	6.1	6.3	GS55044-1300	AS-349
SPGM130-109-7.9	130	109	7.9	8.1	GS55042-1300	108*7
SPGM135-119.5-6.1	135	119.5	6.1	6.3	GS55046-1350	118*5.3
SPGM135-114-7.9	135	114	7.9	8.1	GS55044-1350	AS-425
SPGM140-124.5-6.1	140	124.5	6.1	6.3	GS55046-1400	AS-352
SPGM140-119-7.9	140	119	7.9	8.1	GS55044-1400	AS-426
SPGM145-124-7.9	145	124	7.9	8.1	GS55044-1450	AS-428
SPGM150-129-7.9	150	129	7.9	8.1	GS55044-1500	AS-429
SPGM155-134-7.9	155	134	7.9	8.1	GS55044-1550	AS-431
SPGM160-139-7.9	160	139	7.9	8.1	GS55044-1600	AS-432
SPGM165-144-7.9	165	144	7.9	8.1	GS55044-1650	AS-434
SPGM170-149-7.9	170	149	7.9	8.1	GS55044-1700	AS-435
SPGM175-154-7.9	175	154	7.9	8.1	GS55044-1750	AS-437
SPGM180-159-7.9	180	159	7.9	8.1	GS55044-1800	AS-438
SPGM190-169-7.9	190	169	7.9	8.1	GS55044-1900	AS-439
SPGM200-179-7.9	200	179	7.9	8.1	GS55044-2000	AS-441
SPGM210-189-7.9	210	189	7.9	8.1	GS55044-2100	AS-442
SPGM220-199-7.9	220	199	7.9	8.1	GS55044-2200	AS-444
SPGM230-209-7.9	230	209	7.9	8.1	GS55044-2300	209*7
SPGM240-219-7.9	240	219	7.9	8.1	GS55044-2400	AS-446
SPGM250-229-7.9	250	229	7.9	8.1	GS55044-2500	AS-447
SPGM260-239-7.9	260	239	7.9	8.1	GS55044-2600	AS-448
SPGM270-249-7.9	270	249	7.9	8.1	GS55044-2700	AS-448
SPGM275-254-7.9	275	254	7.9	8.1	GS55044-2750	AS-449
SPGM280-259-7.9	280	259	7.9	8.1	GS55044-2800	AS-449

SPGM型 活塞专用密封件

名义号	密封件公称尺寸			槽宽 (h+0.2)	通用编号	O型圈
	D	d	h			
SPGM290-269-7.9	290	269	7.9	8.1	GS55044-2900	AS-450
SPGM300-279-7.9	300	279	7.9	8.1	GS55044-3000	AS-451
SPGM310-289-7.9	310	289	7.9	8.1	GS55044-3100	AS-451
SPGM320-299-7.9	320	299	7.9	8.1	GS55044-3200	AS-452
SPGM330-305.5-7.9	330	305.5	7.9	8.1	GS55044-3300	AS-453
SPGM340-315.5-7.9	340	315.5	7.9	8.1	GS55044-3400	AS-454
SPGM350-325.5-7.9	350	325.5	7.9	8.1	GS55044-3500	AS-454
SPGM360-335.5-7.9	360	335.5	7.9	8.1	GS55044-3600	AS-455
SPGM370-345.5-7.9	370	345.5	7.9	8.1	GS55044-3700	AS-456
SPGM380-355.5-7.9	380	355.5	7.9	8.1	GS55044-3800	AS-457
SPGM390-365.5-7.9	390	365.5	7.9	8.1	GS55044-3900	360*7
SPGM400-375.5-7.9	400	375.5	7.9	8.1	GS55044-4000	AS-458
SPGM410-385.5-7.9	410	385.5	7.9	8.1	GS55044-4100	AS-459
SPGM420-395.5-7.9	420	395.5	7.9	8.1	GS55044-4200	AS-460
SPGM430-405.5-7.9	430	405.5	7.9	8.1	GS55044-4300	AS-461
SPGM435-410.5-7.9	435	410.5	7.9	8.1	GS55044-4350	405*7
SPGM440-415.5-7.9	440	415.5	7.9	8.1	GS55044-4400	AS-461
SPGM450-425.5-7.9	450	425.5	7.9	8.1	GS55044-4500	AS-462
SPGM460-435.5-7.9	460	435.5	7.9	8.1	GS55044-4600	AS-463
SPGM470-445.5-7.9	470	445.5	7.9	8.1	GS55044-4700	AS-464
SPGM480-455.5-7.9	480	455.5	7.9	8.1	GS55044-4800	AS-465
SPGM490-465.5-7.9	490	465.5	7.9	8.1	GS55044-4900	460*7
SPGM500-475.5-7.9	500	475.5	7.9	8.1	GS55044-5000	AS-466
SPGM510-485.5-7.9	510	485.5	7.9	8.1	GS55044-5100	AS-467
SPGM520-495.5-7.9	520	495.5	7.9	8.1	GS55044-5200	AS-468
SPGM530-505.5-7.9	530	505.5	7.9	8.1	GS55044-5300	AS-468
SPGM540-515.5-7.9	540	515.5	7.9	8.1	GS55044-5400	AS-469
SPGM550-525.5-7.9	550	525.5	7.9	8.1	GS55044-5500	AS-469
SPGM560-535.5-7.9	560	535.5	7.9	8.1	GS55044-5600	AS-470
SPGM570-545.5-7.9	570	545.5	7.9	8.1	GS55044-5700	AS-470
SPGM580-555.5-7.9	580	555.5	7.9	8.1	GS55044-5800	550*7
SPGM600-575.5-7.9	600	575.5	7.9	8.1	GS55044-6000	AS-471
SPGM610-585.5-7.9	610	585.5	7.9	8.1	GS55044-6100	AS-472