


DSM型

往复运动用防尘密封件

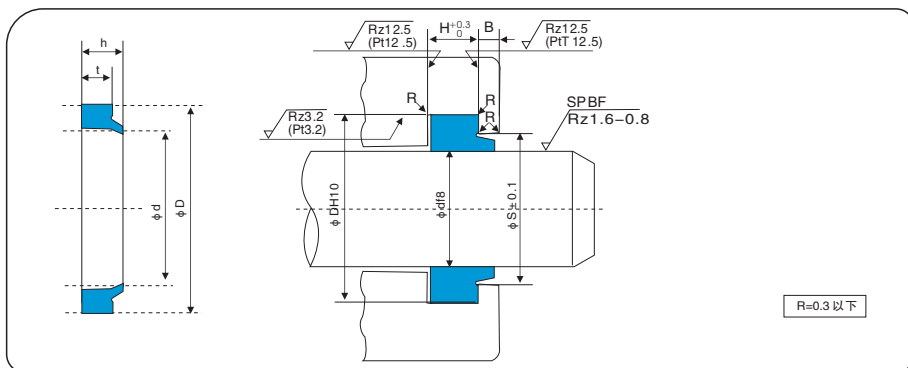

1、特点:

单唇口具有高防尘性能的标准型密封圈。

2、应用范围

挖掘机、推土机、平路机、装载机、运输车、铲车
冲压机、切割机、折弯机、注塑机、液压设备

3、使用工况: 往复运动

4、材料: 聚氨酯

5、应用极限

最大速度: 0.5 m/s

温度范围: -45~100℃

DSM型

往复运动用防尘密封件

名义号	密封件公称尺寸				腔体尺寸		
	d	D	t	h	φS	H	B
DSM6.3-14.3-4.5/6	6.3	14.3	4.5	6	10.3	5	2
DSM8-16-4.5/6	8	16	4.5	6	12	5	2
DSM9-17-4.5/6	9	17	4.5	6	13	5	2
DSM10-18-4.5/6	10	18	4.5	6	14	5	2
DSM11.2-19.2-4.5/6	11.2	19.2	4.5	6	15.2	5	2
DSM12.5-20.5-4.5/6	12.5	20.5	4.5	6	16.5	5	2
DSM12.5-20.5-4.5/6	12.5	20.5	4.5	6	16.5	5	2
DSM14-22-4.5/6	14	22	4.5	6	18	5	2
DSM15-23-4.5/6	15	23	4.5	6	19	5	2
DSM16-24-4.5/6	16	24	4.5	6	20	5	2
DSM18-26-4.5/6	18	26	4.5	6	22	5	2
DSM20-28-4.5/6	20	28	4.5	6	24	5	2
DSM22-30-5/6.5	22	30	5	6.5	26	6	2
DSM22.4-30.4-4.5/6	22.4	30.4	4.5	6	26.4	5	2
DSM22.4-30.4-5/6.5	22.4	30.4	5	6.5	26.4	5	2
DSM23.5-31.5-4.5/6	23.5	31.5	4.5	6	27.5	5	2
DSM25-33-4.5/6	25	33	4.5	6	29	5	2
DSM25-33-5/6.5	25	33	5	6.5	29	6	2
DSM25-35-6/8	25	35	6	8	30	6	2
DSM28-36-5/6.5	28	36	5	6.5	32	6	2
DSM30-38-5/6.5	30	38	5	6.5	34	6	2
DSM30-40-6/8	30	40	6	8	35	7	2
DSM31.5-39.5-5/6.5	31.5	39.5	5	6.5	35.5	6	2
DSM35-43-5/6.5	35	43	5	6.5	39	6	2
DSM35-43-6/8	35	43	6	8	39	7	2
DSM35.5-43.5-5/6.5	35.5	43.5	5	6.5	39.5	6	2
DSM35.5-43.5-6/8	35.5	43.5	6	8	39.5	7	2
DSM40-48-5/6.5	40	48	5	6.5	44	6	2
DSM40-50-6/8	40	50	6	8	45	7	2
DSM45-53-5/6.5	45	53	5	6.5	49	6	2
DSM45-55-6/8	45	55	6	8	50	7	2
DSM50-58-5/6.5	50	58	5	6.5	54	6	2
DSM50-60-6/8	50	60	6	8	55	7	2
DSM53-61-5/6.5	53	61	5	6.5	57	6	2
DSM53-53-6/8.5	53	53	6	8.5	53	7	2
DSM53-66-7/9.5	53	66	7	9.5	59.5	8	2
DSM55-63-5/6.5	55	63	5	6.5	59	6	2
DSM55-65-6/8	55	65	6	8	60	7	2
DSM55-68-7/9.5	55	68	7	9.5	61.5	8	2
DSM56-64-5/6.5	56	64	5	6.5	60	6	2
DSM56-66-6/8	56	66	6	8	61	7	2
DSM56-69-7/9.5	56	69	7	9.5	62.5	8	2
DSM60-68-5/6.5	60	68	5	6.5	64	6	2
DSM60-73-7/9.5	60	73	7	9.5	66.5	8	2
DSM63-71-5/6.5	63	71	5	6.5	67	6	2
DSM63-76-7/9.5	63	76	7	9.5	69.5	8	2
DSM65-73-5/6.5	65	73	5	6.5	69	6	2
DSM65-78-7/9.5	65	78	7	9.5	71.5	8	2

名义号	密封件公称尺寸				腔体尺寸		
	d	D	t	h	ϕS	H	B
DSM67-75-5/6.5	67	75	5	6.5	71	6	2
DSM67-80-7/9.5	67	80	7	9.5	73.5	8	2
DSM70-80-6/8	70	80	6	8	75	7	3
DSM70-83-7/9.5	70	83	7	9.5	76.5	8	3
DSM71-81-6/8	71	81	6	8	76	7	3
DSM71-84-7/9.5	71	84	7	9.5	77.5	8	3
DSM72-82-6/8	72	82	6	8	77	7	3
DSM75-85-6/8	75	85	6	8	80	7	3
DSM75-88-7/9.5	75	88	7	9.5	81.5	8	3
DSM80-90-6/8	80	90	6	8	85	7	3
DSM80-93-7/9.5	80	93	7	9.5	86.5	8	3
DSM85-95-6/8	85	95	6	8	90	7	3
DSM85-98-7/9.5	85	98	7	9.5	91.5	8	3
DSM90-100-6/8	90	100	6	8	95	7	3
DSM90-103-7/9.5	90	103	7	9.5	96.5	8	3
DSM95-105-6/8	95	105	6	8	100	7	3
DSM95-108-7/9.5	95	108	7	9.5	101.5	8	3
DSM100-110-6/8	100	110	6	8	105	7	3
DSM100-113-7/9.5	100	113	7	9.5	106.5	8	3
DSM105-115-6/8	105	115	6	8	110	7	3
DSM105-118-7/9.5	105	118	7	9.5	111.5	8	3
DSM106-116-6/8	106	116	6	8	111	7	3
DSM106-119-7/9.5	106	119	7	9.5	112.5	8	3
DSM110-120-6/8	110	120	6	8	115	7	3
DSM110-123-7/9.5	110	123	7	9.5	116.5	8	3
DSM112-122-6/8	112	122	6	8	117	7	3
DSM112-125-7/9.5	112	125	7	9.5	118.5	8	3
DSM118-128-6/8	118	128	6	8	123	7	3
DSM120-130-6/8	120	130	6	8	125	7	4
DSM120-133-7/9.5	120	133	7	9.5	126.5	8	4
DSM125-138-7/9.5	125	138	7	9.5	131.5	8	4
DSM130-143-7/9.5	130	143	7	9.5	136.5	8	4
DSM132-145-7/9.5	132	145	7	9.5	138.5	8	4
DSM135-148-7/9.5	135	148	7	9.5	141.5	8	4
DSM140-153-7/9.5	140	153	7	9.5	146.5	8	4
DSM145-158-7/9.5	145	158	7	9.5	151.5	8	4
DSM150-163-7/9.5	150	163	7	9.5	156.5	8	4
DSM155-168-7/9.5	155	168	7	9.5	161.5	8	4
DSM160-173-7/9.5	160	173	7	9.5	166.5	8	4
DSM170-183-7/9.5	170	183	7	9.5	176.5	8	4
DSM175-188-7/9.5	175	188	7	9.5	181.5	8	4
DSM180-193-7/9.5	180	193	7	9.5	186.5	8	4
DSM185-198-7/9.5	185	198	7	9.5	191.5	8	5
DSM190-203-7/9.5	190	203	7	9.5	196.5	8	5
DSM199-212-7/9.5	199	212	7	9.5	205.5	8	5
DSM200-213-7/9.5	200	213	7	9.5	206.5	8	5
DSM204-217-7/9.5	204	217	7	9.5	210.5	8	5
DSM210-223-7/9.5	210	223	7	9.5	216.5	8	5

名义号	密封件公称尺寸				腔体尺寸		
	d	D	t	h	ϕS	H	B
DSM210-226-9/12	210	226	9	12	218	10	5
DSM220-233-7/9.5	220	233	7	9.5	226.5	8	5
DSM220-236-9/12	220	236	9	12	228	10	5
DSM224-237-7/9.5	224	237	7	9.5	230.5	8	5
DSM225-238-7/9.5	225	238	7	9.5	231.5	8	5
DSM230-243-7/9.5	230	243	7	9.5	236.5	8	5
DSM230-246-9/12	230	246	9	12	238	10	5
DSM240-253-7/9.5	240	253	7	9.5	246.5	8	5
DSM240-256-9/12	240	256	9	12	248	10	5
DSM250-263-7/9.5	250	263	7	9.5	256.5	8	5
DSM250-266-9/12	250	266	9	12	258	10	5
DSM260-275-9/12	260	275	9	12	267.5	10	5
DSM260-276-9/12	260	276	9	12	268	10	5
DSM270-285-9/12	270	285	9	12	277.5	10	5
DSM270-286-9/12	270	286	9	12	278	10	5
DSM280-295-9/12	280	295	9	12	287.5	10	5
DSM280-296-9/12	280	296	9	12	288	10	5
DSM290-305-9/12	290	305	9	12	297.5	10	5
DSM290-306-9/12	290	306	9	12	298	10	5
DSM300-315-9/12	300	315	9	12	307.5	10	5
DSM300-316-9/12	300	316	9	12	308	10	5