


SPNM型


活塞杆专用密封件

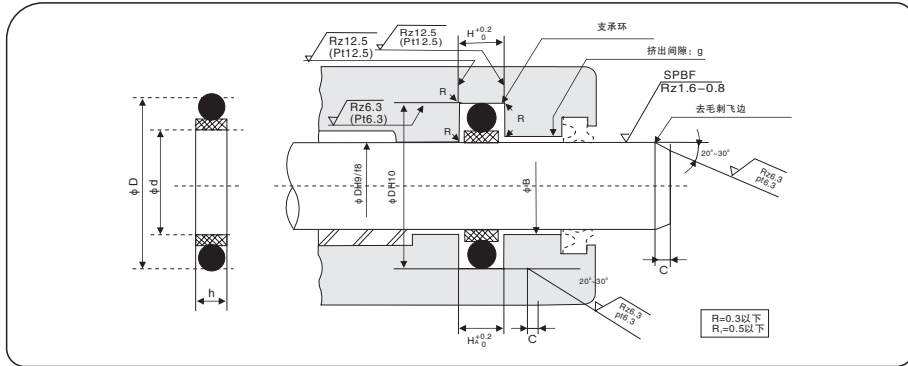

- 1、特点:
滑动材料选用复合聚四氟乙烯, 适用高压系统, 快速工况。
- 2、应用范围
挖掘机、推土机、平路机、装载机、运输车、铲车
冲压机、切割机、折弯机、注塑机、液压设备
- 3、使用工况: 往复运动
- 4、材料: PTFE+丁腈胶
- 5、应用极限
最大压力: 35 MPa
最大速度: 3 m/s
温度范围: -30 ~ 100℃

如何决定B的尺寸

■ 决定 ϕB 尺寸, 考虑活塞的偏心之后, 请把最大挤出间隙 (单侧) 与右图对照。



SPNM型 活塞杆专用密封件

名义号	d	D	h+0.2	通用编号	O型圈
SPNM4-8.9-2.2	4	8.9	2.2	GS55043-0040	5.6*1.8
SPNM5-9.9-2.2	5	9.9	2.2	GS55043-0050	6.7*1.8
SPNM6-10.9-2.2	6	10.9	2.2	GS55043-0060	AS-011
SPNM8-15.3-3.2	8	15.3	3.2	GS55043-0080	AS-111
SPNM10-17.3-3.2	10	17.3	3.2	GS55043-0100	AS-112
SPNM12-16.9-2.2	12	16.9	2.2	GS55045-0120	AS-015
SPNM12-19.3-3.2	12	19.3	3.2	GS55043-0120	AS-113
SPNM14-18.9-2.2	14	18.9	2.2	GS55045-0140	AS-016
SPNM14-21.3-3.2	14	21.3	3.2	GS55043-0140	AS-115
SPNM15-22.3-3.2	15	22.3	3.2	GS55043-0150	AS-115
SPNM16-23.3-3.2	16	23.3	3.2	GS55043-0160	AS-116
SPNM18-25.3-3.2	18	25.3	3.2	GS55043-0180	AS-117
SPNM19-29.7-4.2	19	29.7	4.2	GS55043-0190	AS-213
SPNM20-27.3-3.2	20	27.3	3.2	GS55045-0200	AS-118
SPNM20-30.7-4.2	20	30.7	4.2	GS55043-0200	AS-214
SPNM22-29.3-3.2	22	29.3	3.2	GS55045-0220	AS-120
SPNM22-32.7-4.2	22	32.7	4.2	GS55043-0220	AS-215
SPNM25-32.3-3.2	25	32.3	3.2	GS55045-0250	AS-121
SPNM25-35.7-4.2	25	35.7	4.2	GS55043-0250	AS-217
SPNM28-38.7-4.2	28	38.7	4.2	GS55043-0280	AS-219
SPNM30-40.7-4.2	30	40.7	4.2	GS55043-0300	AS-220
SPNM32-42.7-4.2	32	42.7	4.2	GS55043-0320	AS-221
SPNM35-45.7-4.2	35	45.7	4.2	GS55043-0350	AS-222
SPNM36-46.7-4.2	36	46.7	4.2	GS55043-0360	AS-223
SPNM38-48.7-4.2	38	48.7	4.2	GS55045-0380	AS-223
SPNM38-53.1-6.3	38	53.1	6.3	GS55043-0380	AS-327
SPNM40-50.7-4.2	40	50.7	4.2	GS55045-0400	AS-224
SPNM40-55.1-6.3	40	55.1	6.3	GS55043-0400	AS-327
SPNM42-52.7-4.2	42	52.7	4.2	GS55045-0420	AS-225
SPNM42-57.1-6.3	42	57.1	6.3	GS55043-0420	AS-328
SPNM45-55.7-4.2	45	55.7	4.2	GS55045-0450	AS-226
SPNM45-60.1-6.3	45	60.1	6.3	GS55043-0450	AS-329
SPNM50-60.7-4.2	50	60.7	4.2	GS55045-1500	AS-227
SPNM50-65.1-6.3	50	65.1	6.3	GS55043-0500	AS-331
SPNM55-65.7-4.2	55	65.7	4.2	GS55045-0500	AS-229
SPNM55-70.1-6.3	55	70.1	6.3	GS55043-0550	AS-332
SPNM56-66.7-4.2	56	66.7	4.2	GS55045-0560	AS-229
SPNM56-71.1-6.3	56	71.1	6.3	GS55043-0560	AS-333
SPNM60-70.7-4.2	60	70.7	4.2	GS55045-0600	AS-230
SPNM60-75.1-6.3	60	75.1	6.3	GS55043-0600	AS-334
SPNM63-73.7-4.2	63	73.7	4.2	GS55045-0630	AS-231
SPNM63-78.1-6.3	63	78.1	6.3	GS55043-0630	AS-335
SPNM65-80.1-6.3	65	80.1	6.3	GS55045-0650	AS-335
SPNM70-85.1-6.3	70	85.1	6.3	GS55043-0700	AS-337
SPNM75-90.1-6.3	75	90.1	6.3	GS55043-0750	AS-339
SPNM80-95.1-6.3	80	95.1	6.3	GS55045-0800	AS-340
SPNM85-100.1-6.3	85	100.1	6.3	GS55043-0850	AS-342
SPNM90-105.1-6.3	90	105.1	6.3	GS55043-0900	AS-343

SPNM型 活塞杆专用密封件

名义号	d	D	h+0.2	通用编号	O型圈
SPNM95-110.1-6.3	95	110.1	6.3	GS55043-0950	AS-345
SPNM100-115.1-6.3	100	115.1	6.3	GS55043-1000	AS-347
SPNM105-120.1-6.3	105	120.1	6.3	GS55043-1050	AS-348
SPNM110-125.1-6.3	110	125.1	6.3	GS55043-1100	AS-350
SPNM115-130.1-6.3	115	130.1	6.3	GS55043-1150	AS-351
SPNM120-135.1-6.3	120	135.1	6.3	GS55043-1200	AS-353
SPNM125-140.1-6.3	125	140.1	6.3	GS55043-1250	AS-354
SPNM130-145.1-6.3	130	145.1	6.3	GS55043-1300	AS-356
SPNM140-155.1-6.3	140	155.1	6.3	GS55043-1400	AS-358
SPNM145-160.1-6.3	145	160.1	6.3	GS55043-1450	AS-361
SPNM150-165.1-6.3	150	165.1	6.3	GS55043-1500	AS-362
SPNM160-175.1-6.3	160	175.1	6.3	GS55043-1600	AS-363
SPNM160-180.5-8.1	160	180.5	8.1	GS55011-1600	AS-440
SPNM165-180.1-6.3	165	180.1	6.3	GS55043-1650	AS-364
SPNM170-185.1-6.3	170	185.1	6.3	GS55043-1700	AS-365
SPNM175-190.1-6.3	175	190.1	6.3	GS55043-1750	AS-366
SPNM180-195.1-6.3	180	195.1	6.3	GS55043-1800	AS-366
SPNM180-200.5-8.1	180	200.5	8.1	GS55011-1800	AS-443
SPNM190-205.1-6.3	190	205.1	6.3	GS55043-1900	AS-368
SPNM195-210.1-6.3	195	210.1	6.3	GS55043-1950	AS-368
SPNM200-220.5-8.1	200	220.5	8.1	GS55043-2000	209*7
SPNM210-230.5-8.1	210	230.5	8.1	GS55043-2100	AS-446
SPNM220-240.5-8.1	220	240.5	8.1	GS55043-2200	AS-447
SPNM230-250.5-8.1	230	250.5	8.1	GS55043-2300	AS-448
SPNM240-260.5-8.1	240	260.5	8.1	GS55043-2400	AS-449
SPNM250-270.5-8.1	250	270.5	8.1	GS55043-2500	AS-450
SPNM260-284-8.1	260	284	8.1	GS55043-2600	AS-450
SPNM270-294-8.1	270	294	8.1	GS55043-2700	AS-451
SPNM280-304-8.1	280	304	8.1	GS55043-2800	AS-451
SPNM290-314-8.1	290	314	8.1	GS55043-2900	AS-453
SPNM300-324-8.1	300	324	8.1	GS55043-3000	AS-454
SPNM310-334-8.1	310	334	8.1	GS55043-3100	AS-454
SPNM320-344-8.1	320	344	8.1	GS55043-3200	AS-455
SPNM340-364-8.1	340	364	8.1	GS55043-3400	AS-457
SPNM350-374-8.1	350	374	8.1	GS55043-3500	AS-458
SPNM360-384-8.1	360	384	8.1	GS55043-3600	AS-458
SPNM370-394-8.1	370	394	8.1	GS55043-3700	AS-459
SPNM380-404-8.1	380	404	8.1	GS55043-3800	AS-460
SPNM390-414-8.1	390	414	8.1	GS55043-3900	AS-461
SPNM400-424-8.1	400	424	8.1	GS55043-4000	AS-461
SPNM410-434-8.1	410	434	8.1	GS55043-4100	AS-462
SPNM420-444-8.1	420	444	8.1	GS55043-4200	AS-463
SPNM430-454-8.1	430	454	8.1	GS55043-4300	AS-464
SPNM440-464-8.1	440	464	8.1	GS55043-4400	AS-465
SPNM450-474-8.1	450	474	8.1	GS55043-4500	AS-466
SPNM460-484-8.1	460	484	8.1	GS55043-4600	AS-466
SPNM470-494-8.1	470	494	8.1	GS55043-4700	AS-467
SPNM480-504-8.1	480	504	8.1	GS55043-4800	AS-468

SPNM型 活塞杆专用密封件

名义号	d	D	h+0.2	通用编号	O型圈
SPNM490-514-8.1	490	514	8.1	GS55043-4900	AS-469
SPNM500-524-8.1	500	524	8.1	GS55043-5000	AS-469
SPNM510-534-8.1	510	534	8.1	GS55043-5100	AS-470
SPNM520-544-8.1	520	544	8.1	GS55043-5200	AS-470
SPNM530-554-8.1	530	554	8.1	GS55043-5300	AS-471
SPNM540-564-8.1	540	564	8.1	GS55043-5400	AS-471
SPNM550-574-8.1	550	574	8.1	GS55043-5500	AS-471
SPNM560-584-8.1	560	584	8.1	GS55043-5600	AS-472
SPNM580-604-8.1	580	604	8.1	GS55043-5800	AS-473
SPNM600-624-8.1	600	624	8.1	GS55043-6000	AS-473
SPNM610-634-8.1	610	634	8.1	GS55043-6100	AS-474